


HOSES & FLEX LANCES

StoneAge provides a full arrangement of hoses and flex lances for ultra high pressure waterblasting.

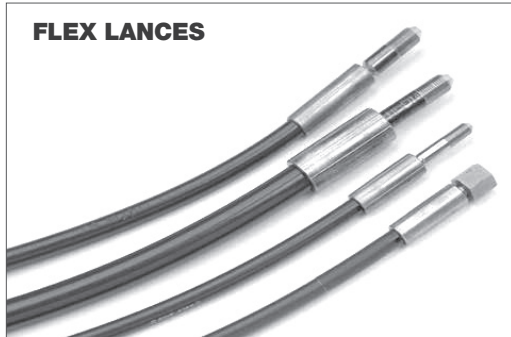

FLEX LANCES

HOSES

1/4-28 THREADED LANCES	TYPE M SWIVEL SIZE	TOOL END CONN.	LENGTH		INSIDE DIAMETER		OUTSIDE DIAMETER		CRIMP DIAMETER		MAWP		WEIGHT		MIN. BEND RAD.	
			ft	m	in	mm	in	mm	in	mm	psi	bar	Lb/ft	KG/M	in	mm
ACHO H36035FTM4NZLM	9/16 Type M	1/4-28 LH Male BP	35	10.7	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
ACHO H36050FTM4NZLM	9/16 Type M	1/4-28 LH Male BP	50	15.25	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
3/8-24 THREADED LANCES	TYPE M SWIVEL SIZE	TOOL END CONN.	LENGTH		INSIDE DIAMETER		OUTSIDE DIAMETER		CRIMP DIAMETER		MAWP		WEIGHT		MIN. BEND RAD.	
			ft	m	in	mm	in	mm	in	mm	psi	bar	bs/Ft	KG/M	in	mm
ACHO H36035FTM6HPS	9/16 Type M	3/8-24 LH Male Long	35	10.7	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
ACHO H36050FTM6HPS	9/16 Type M	3/8-24 RH Female Long	35	10.7	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
ACHO H36035FTM6NZLM	9/16 Type M	3/8-24 RH Male BP	35	10.7	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
ACHO H36050FTM6NZLM	9/16 Type M	3/8-24 LH Male BP	50	15.25	0.13	3	0.036	9.1	0.6	15.3	40600	2800	0.149	0.222	5.91	150
ACHO H46035FTM6HPS	9/16 Type M	3/8-24 RH Female Long	50	15.25	0.16	4	0.45	11.5	0.67	17.1	40600	2800	0.245	0.365	6.89	175
ACHO H46050FTM6HPS	9/16 Type M	3/8-24 RH Male Long	50	15.25	0.16	4	0.45	11.5	0.67	17.1	40600	2800	0.245	0.365	6.89	175
9/16-18 THREADED LANCES	TYPE M SWIVEL SIZE	TOOL END CONN.	LENGTH		INSIDE DIAMETER		OUTSIDE DIAMETER		CRIMP DIAMETER		MAWP		WEIGHT		MIN. BEND RAD.	
			ft	m	in	mm	in	mm	in	mm	psi	bar	bs/Ft	KG/M	in	mm
ACHO H56H035FTM9HPS	3/4 Type M	9/16-18 LH Male Long	35	10.7	0.2	5	0.52	13.2	0.68	17.5	36250	2500	0.302	0.450	7.87	200
ACHO H56H050FTM9HPS	3/4 Type M	9/16-18 RH Male Long	35	10.7	0.2	5	0.52	13.2	0.68	17.5	36250	2500	0.302	0.450	7.87	200