


FITTINGS 15K PSI (1000 BAR)

SCREW TYPE QUICK CONNECT COUPLINGS - PARTEK


- Heavy duty stainless steel for high durability
- Easy-grip texturing for hand-tight connections
- Interchangeable 3/4 and 1" NPT coupling halves
- Seal kits with O-ring and backup ring available

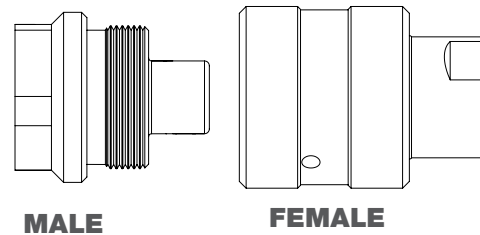

PART NO.	CONNECTION TYPE	COUPLING HALVES		SEAL KIT	RETAINING RING	MAX. OPERATING PRESSURE	
		Female	Male			psi	bar
GP 060-P6	3/8" NPT Female	GP 060-P6F	GP 060-P6M	GP 660-P8	GP 661-P8	15k	1000
GP 060-P8	1/2" NPT Female	GP 060-P8F	GP 060-P8M	GP 660-P8	GP 661-P8	15k	1000
GP 060-P12	3/4" NPT Female	GP 060-P12F	GP 060-P12M	GP 660-P12	GP 661-P12	12k	830
GP 060-P16	1" NPT Female	GP 060-P16F	GP 060-P16M	GP 660-P16	GP 661-P16	10k	700

LUG STYLE QUICK CONNECT COUPLINGS

- Quick connection to hoses and other components with retracting spring-loaded sleeve
- Safety pin prevents accidental disconnect
- Interchangeable 3/8 and 1/2 coupling halves
- High quality plated steel

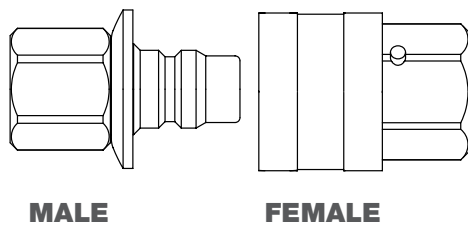

PART NO.	CONNECTION TYPE	COUPLING HALVES		MAX. OPERATING PRESSURE		SEAL KIT	O-RING	B/U RING
		Male	Female	psi	bar			
GP 160-P8	1/2" NPT Female	GP 160-P8F	GP 160-P8M	10k	700	GP 665-P8	GP 665.1	GP 665.2

OPERATING WATERBLASTING EQUIPMENT CAN BE POTENTIALLY HAZARDOUS.




See page 9.10 for important safety information

FITTINGS 15K PSI (1000 BAR)

15K AIR-OPERATED DUMP VALVES

The Air-Operated Dump Valve allows an operator to remotely control pressure in cleaning applications from 15k psi (1000 bar). When air is sent to the cylinder, the valve closes and allows the system to build pressure. The valve opens when the air is exhausted, reducing system pressure to near atmospheric.

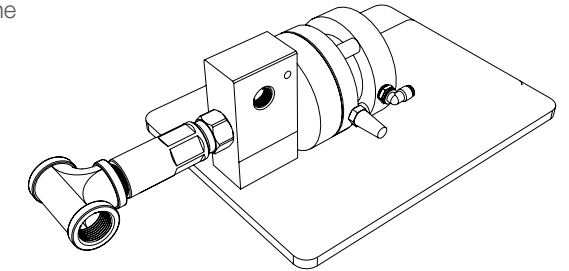


PART NO.	DESCRIPTION
ACDA 61001007	Dump Assembly, 15K Air Actuated W/Base Plate
ACDA 61010012	Foot Gun Assembly, 15K 1/2 NPT Dump Style
ACDA 61050014	Foot Gun Assy, 15K Air Actuated, High Flow, w/Base Plate
ACDU 61001006	Air Diverter Valve, 15K 1/2 W/O Base Plate

HIGH PRESSURE REPLACEMENT CARTRIDGES

Cartridge Style Design allows dump valve to be rebuilt in under a minute with no special tools.

PART NO.	DESCRIPTION	PRESSURE	
		psi	bar
ACRC 60010020	APS 15k, Hand/Foot, J/S 50902	15k	1034
ACRC 60100004	15k GDWJ Hand/Foot, GDWJ 3102111	15k	1034
ACRC 61020030	CF H/F Mag, J/S 52750	11k	800
ACRC 61050012	10k, High Flow	10k	700
ACRC 61050026	C-15 1in, J/S 53915	15k	1034
ACRC 70010004	15k FDV/PRV, J/S 50234	15k	1034
ACRC 70025000	15k/20k PRV/FDV Repair	15k	1034

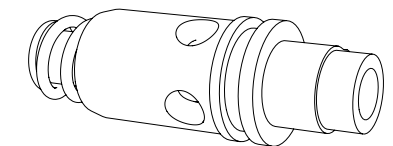

ACCESSORY O-RINGS FOR CARTRIDGES

PART NO.	DESCRIPTION
ACOR 30001018	O-Ring 22-17046
ACOR 30001029	O-Ring
ACOR 30001120	O-Ring
ACOR 30001122	O-Ring J/S 26776
ACOR 30001218	O-Ring GDWJ 22-74207
ACOR 30003018BU	B/U Ring GDWJ 22-17047
ACOR 30003120BU	Back Up Ring
ACOR 30003122BU	Back Up Ring
ACOR 30003218BU	Back Up Ring

