


FITTINGS 20K PSI (1380 BAR)

SLIMLINE LANCE COUPLINGS

- Used to couple rigid and flex lances without the use of glands and collars to allow them to fit into tubes
- Additional couplings available upon request


PART NO.	CONNECTION 1	CONNECTION 2	MAX. WORKING PRESSURE	
			psi	bar
AF 073-MP4LMP4L-SL	1/4" MPLH Female	1/4" MPLH Female	22k	1500
AF 073-MP4RMP4L-SL	1/4" MPRH Female	1/4" MPLH Female	22k	1500
AF 073-MP4RMP4R-SL	1/4" MPRH Female	1/4" MPRH Female	22k	1500
AF 073-MP4RMP6R-SL	1/4" MPRH Female	3/8" MPRH Female	22k	1500
AF 073-MP6LMP6L-SL	3/8" MPLH Female	3/8" MPLH Female	22k	1500
AF 073-MP6RMP6L-SL	3/8" MPRH Female	3/8" MPLH Female	22k	1500
AF 073-MP6RMP6R-SL	3/8" MPRH Female	3/8" MPRH Female	22k	1500
AF 073-MP6LMP9L-SL	3/8" MPLH Female	9/16" MPLH Female	22k	1500
AF 073-MP6RMP9R-SL	3/8" MPRH Female	9/16" MPRH Female	22k	1500
AF 073-MP9LMP9L-SL	9/16" MPLH Female	9/16" MPLH Female	22k	1500
AF 073-MP9RMP9L-SL	9/16" MPRH Female	9/16" MPLH Female	22k	1500
AF 073-MP9RMP9R-SL	9/16" MPRH Female	9/16" MPRH Female	22k	1500
AF 073-MP9LMP12L-SL	9/16" MPLH Female	3/4" MPLH Female	22k	1500
AF 073-MP9RMP12R-SL	9/16" MPRH Female	3/4" MPRH Female	22k	1500
AF 073-MP12LMP12L-SL	3/4" MPLH Female	3/4" MPLH Female	22k	1500
AF 073-MP12RMP12L-SL	3/4" MPRH Female	3/4" MPLH Female	22k	1500
AF 073-MP12RMP12R-SL	3/4" MPRH Female	3/4" MPRH Female	22k	1500



MANIFOLDS

- Manifolds used in 2L, 3L, BRLM systems

PART NO.	OUTLET CONNECTION	INLET CONNECTION	MAWP PSI/BAR	
			psi	bar
ABX 369-MP12	9/16" MP Female	3/4" MP Female	22k	1500




FITTINGS 20K PSI (1380 BAR)


MEDIUM PRESSURE (MP)

- Industry standard connection for 20k psi (1400 bar) applications.

SIZE REFERENCE CHART SINGLE PIECE MALE • ACTUAL SIZE

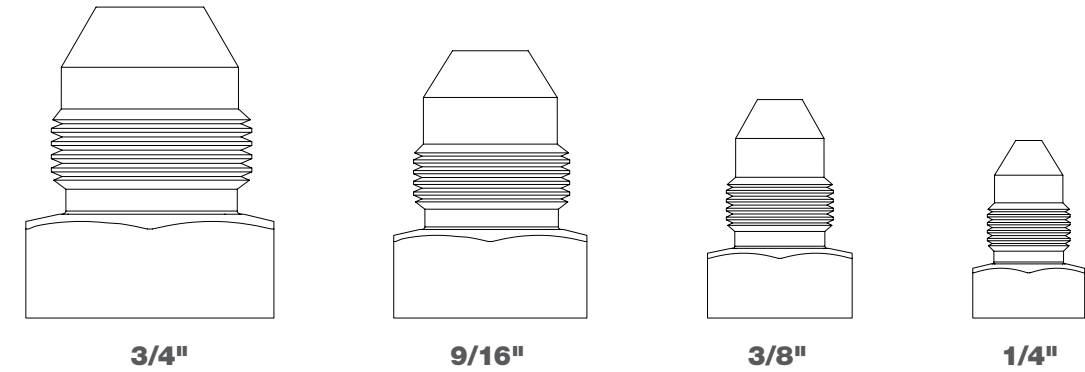

MEDIUM PRESSURE (MP) SIZE REFERENCE CHART GLANDS AND COLLARS • ACTUAL SIZE

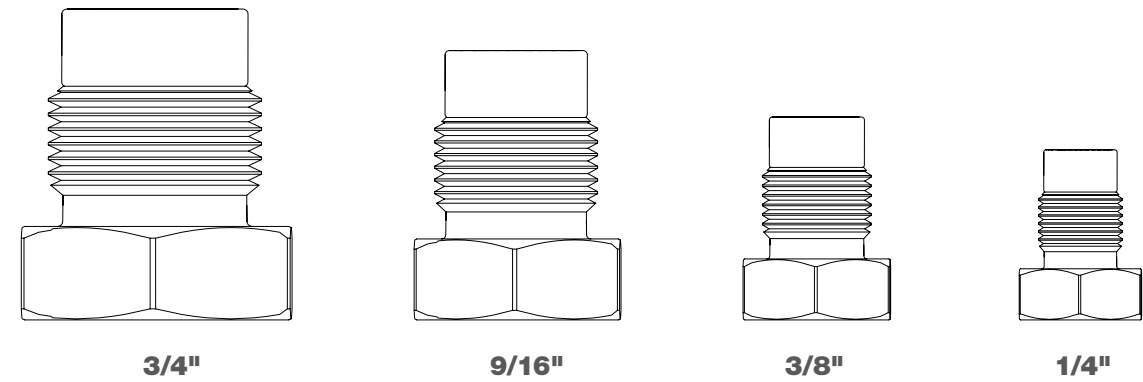

SIZE	GLAND CONNECTION THREAD	TUBING THREAD LEFT-HAND	RECOMMENDED TORQUE	
			ft-lbs	N-m
1/4" MP	7/16" - 20UNF	1/4" - 28UNF	20	27
3/8" MP	9/16" - 18UNF	3/8" - 24UNF	30	41
9/16" MP	13/16" - 16UNF	9/16" - 18UNF	85	15
3/4" MP	3/4" - 14NPSM	3/4" - 16UNF	90	122
1" MP	1-3/8" - 12UNF	1" - 14UNF	125	170